




Air Operated Diaphragm (AOD) pumps




Double acting, pneumatic diaphragm pumps specially made for pumping flexo ink, gravure ink, glue and solvents. The pumps come in two series, 0 to 25 litres & 0 to 70 litres per minute, offering versatility for a wide range of applications.

The pumps offer a compact, low pulsation, easily built in design with turnable in- and outlet ports. Explosion proof and certified according to the ATEX directive.

Technical specifications

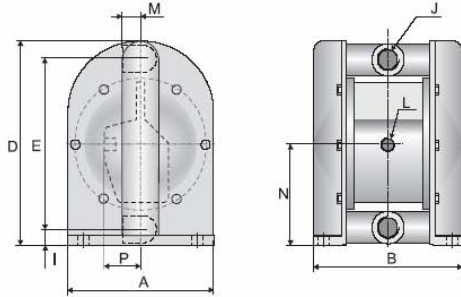

DIMENSIONS										
	A	B	D	E	I	J	L	M	N	P
IP25-S	105	116	160	132	15	1/2"	1/8"	19	81	30
IP70-S	150	168	229	190	20	3/4"	1/4"	29	115	47

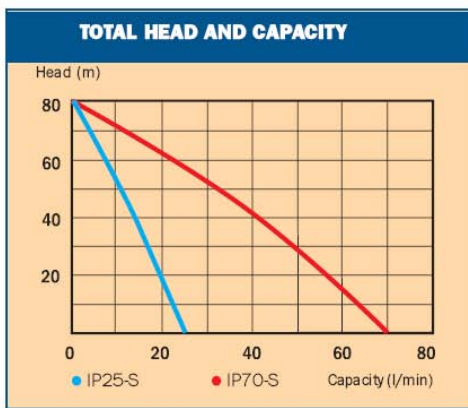

TECHNICAL DATA		
DATA	IP25-S	IP70-S
Maximal capacity (l/min)	25	70
Max pump pressure (bar)	8	8
Max air pressure (bar)	8	8
Weight (kg)	2.5	6.0
MATERIAL		
Pump housing	PTFE coated aluminium	PTFE coated aluminium
Diaphragm	PTFE	PTFE

The Tapflo pump is a Swedish construction specially designed for trouble-free operating and easy service. The version used in FlexoArt's 'ink handling system' is developed in association with FlexoArt in order to obtain optimal suction capacity. This special version is available at all Tapflo retailers and can also be purchased directly from FlexoArt.